

# Magnetic drill

## AIR.52/3



52mm



13mm



60mm



13



min  
6.3bar  
(90 PSI)



1000




55mm

The AIR.52/3 is designed for processing in hazardous areas such as the offshore and petrochemical industry, oil and gas extraction industry, power stations and the ship building and maritime industry.

### Technical data

	AIR.52/3
Annular cutters	Ø 12 - 52 mm
Twist drills	Ø 1 - 13 mm
Length	340 mm
Width	250 mm
Height	560 mm
Stroke	120 mm
Weight	13 kg
Magnet (l x w)	220 x 75 mm
Magnetic force	1000 kg
Speed (no load)	400 min <sup>-1</sup>
Spindle	19,05 mm Weldon
Working pressure	min. 6,3 bar (90 PSI) 0,9 M3/m (30cfm)
Air inlet	3/8" BSP female thread

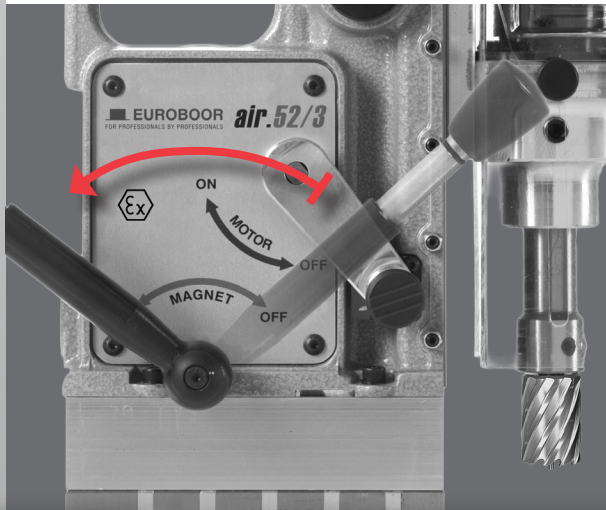

### Features

- Air-powered motor system
- Automatic cooling system
- Failsafe permanent magnet system
- Spark-free (explosion-safe) motor
- Anti-static construction
- Safety interlock (picture left)
- Low noise

